TECHNICAL
SPECIFICATION

PERMASKATE

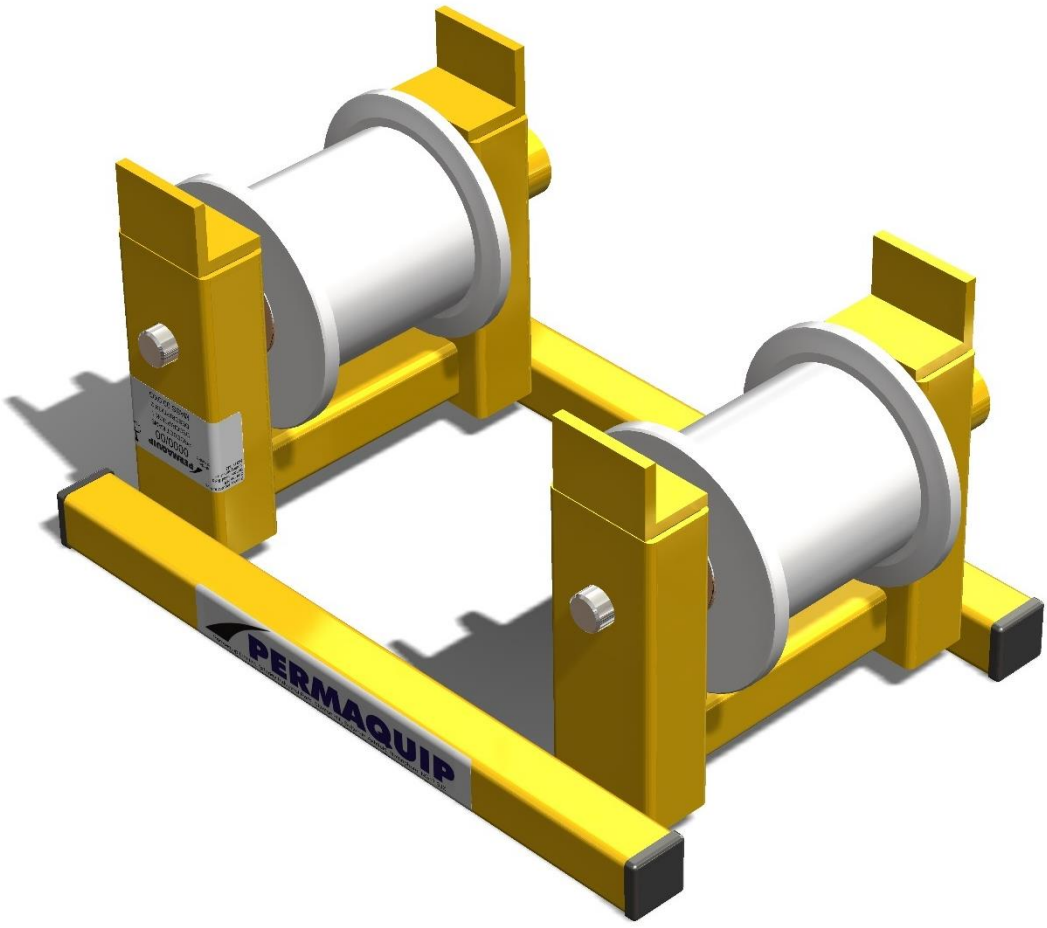

Permaquip Ltd
Old Sleningford Farm,
North Stainley,
Ripon,
North Yorkshire, HG4 3JB

Tel: +44 (0) 1623 513349

E-mail: sales@permaquip.co.uk
www.permaquip.co.uk

MADE IN BRITAIN

Description:

The Permaquip™ Permaskate is designed to be used as a support and rail roller for flat bottom rail, or when fitted with the Permaskate Board, Handles and Skip accessories can be used to move small loads along the rail head.

The Permaskate and its accessories are powder coated yellow for high visibility when on track.

Permaskate, Board, Handles & Skip Layout:

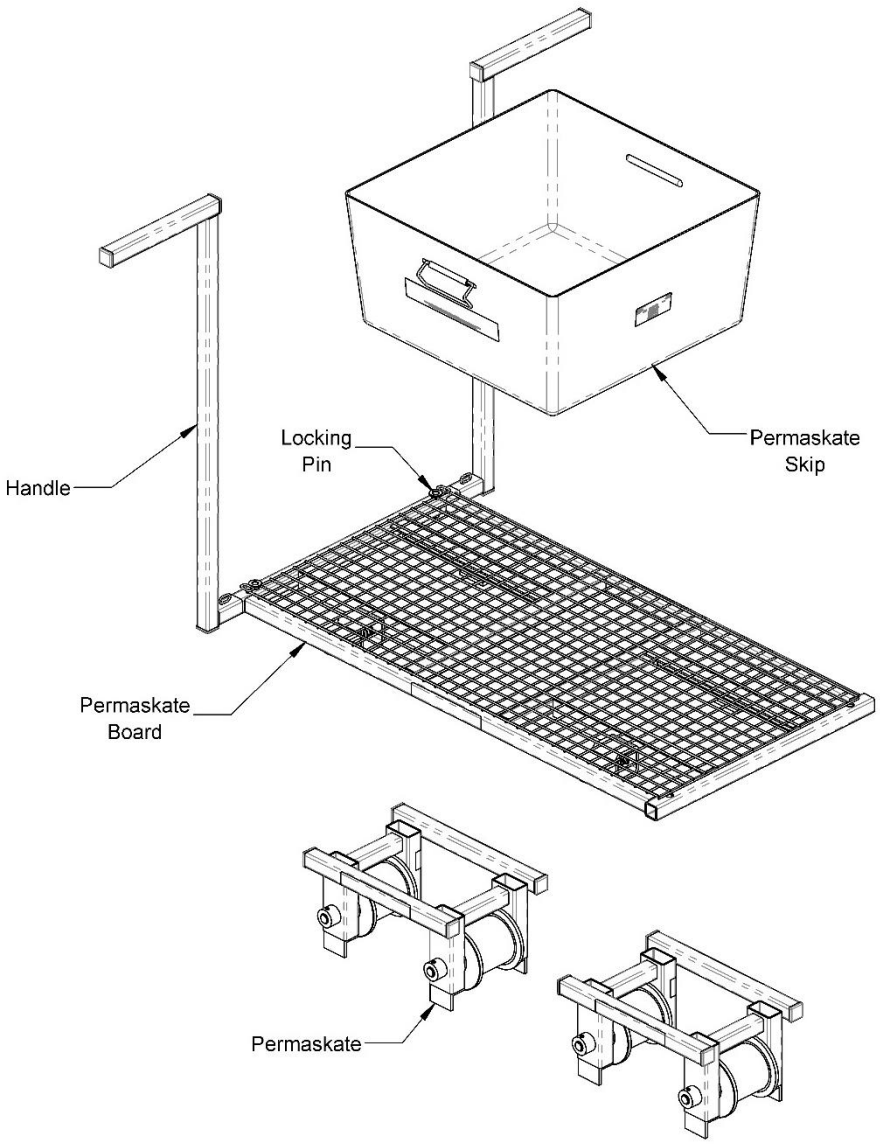

Please note:

All information, illustrations and specifications in this Technical Sheet are based on the latest information available at the time of publication. The right is reserved to make changes at any time without notice.

Equipment operators and installers shall be responsible for ensuring that a safe working environment and safe systems of work are in place and in certain circumstances advice and permission from the controlling authority must be sought before any operation, installation or surveying work is carried out.
Permaquip™ is a trademark of Permaquip Ltd.

©2006 Permaquip Ltd.

Technical Data:

Permaskate Part Numbers:

• Permaskate	27659
• Permaskate Board & Handles (Excluding Permaskates)	26106
• Permaskate Skip	27225

Permaskate overall dimensions:

• Length	331mm
• Width	216mm
• Height	170mm

Permaskate with Board & Handle dimensions:

• Length	920mm
• Width	1040mm
• Height	898mm
• Height from top of rail head	868mm

Track Gauge: N/A

SWL:

• Each Permaskate when supporting rail	1000kg UDL
• 2 Permaskates with Board and Handles	150kg UDL

Mass:

• Permaskate	5.4kg
• Permaskate Board and Handles (when assembled)	16kg
• Permaskate Skip	4kg

Wheels:

• Material:	Nylon
• Profile:	Flat with flanges
• Rolling Diameter	3”
• Insulation	5 MΩ

Maximum Cant: N/A

Maximum Gradient: N/A

Product Compliance:

- Network Rail Grandfather Rights

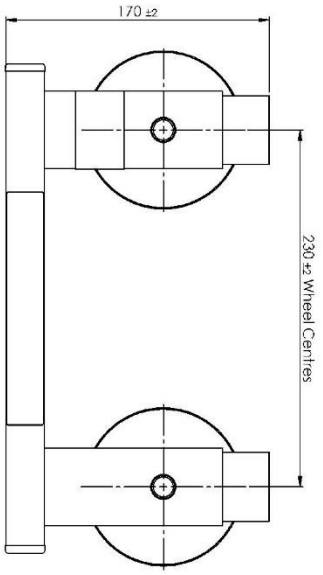

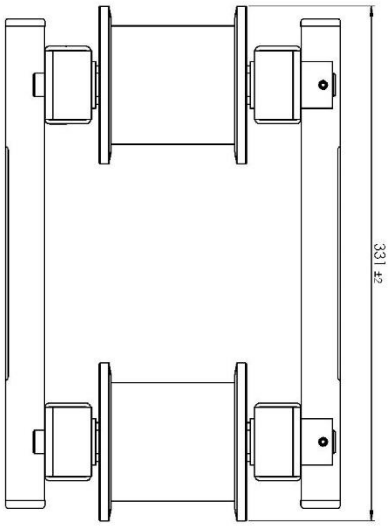



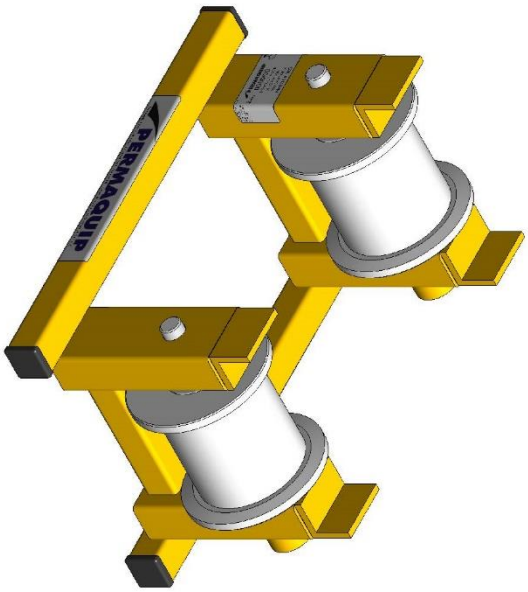

PERMAQUIP

Permaskate

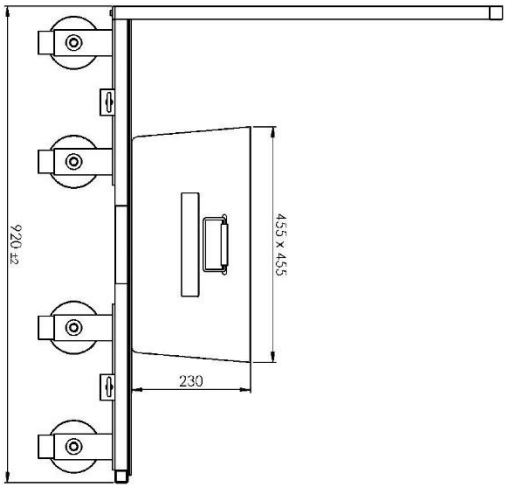

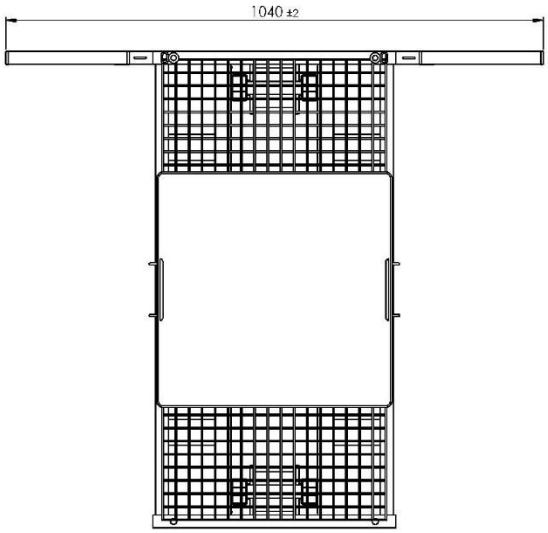

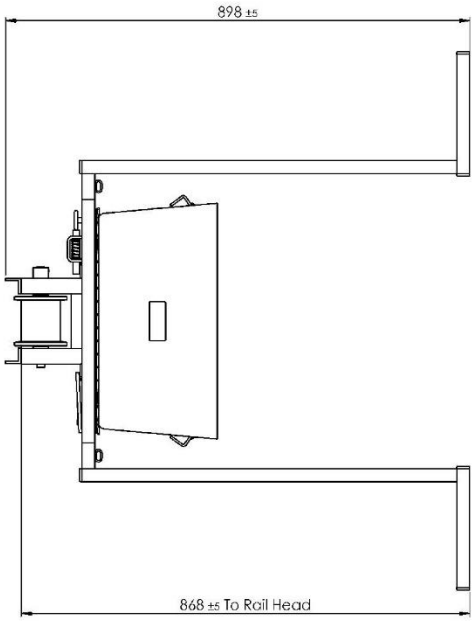

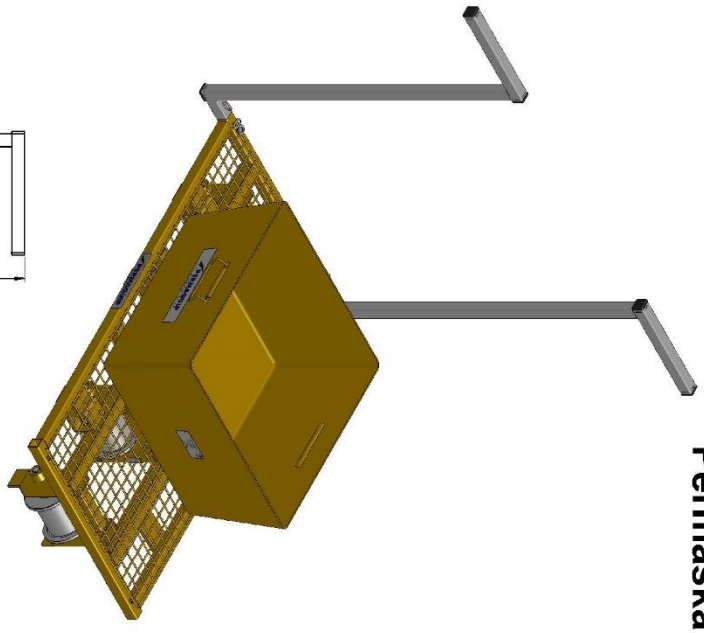

PERMAQUIP

Permaskate